



FIDLOCK®

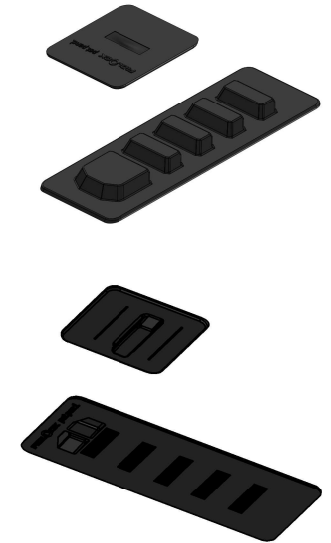

total possible material thickness between male and female part: 3mm
depends on way of assembly,
female part can be assembled from the backside

Product	Stripe X5 Flex
Opening	lifting
Material	TPU, NdFeB, Epoxy
Colour	black
Weight	11,7g
Load capacity	
General notes	stitchable, weldable, shore hardness: 85S



possible stitching area

Proceed like stitching zipper
Use a zipper presser foot and
stitch length 2-3 mm
(For securing the thread we
recommend choosing a position
next to the Fidlock part. Otherwise
stability could be reduced.)

Article No	01343-000002(BLK)
Scale	1:1
Date	24.04.2021
Author	SO

patented technology.