

Snap female S inset screw




patented technology

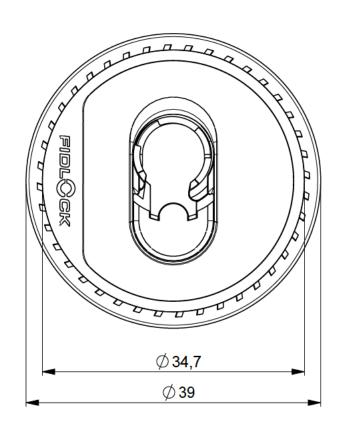

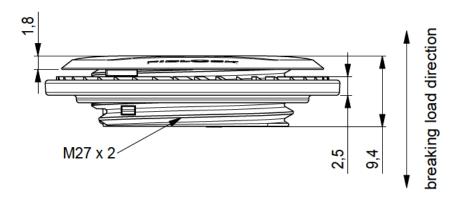

Use T00L34 and T00L3 for assembly and correct logo positioning.

See assembly guide for more information



nominal values in millimeters [mm]

1/1

OPENING	Slide (lateral)	GENERAL NOTES*	Application is designed for various	ARTICLE NO.	05516-000002(BLK)
MATERIAL	PA66 GF15, NdFeB, Epoxy		attachment options and compatible with all SNAP female S components	PRODUCT	SNAP female S inset srcew
COLOUR	Black			SCALE	1:1 DIN A4
WEIGHT	~ 6,6 g (weighed)			REVISION / DATE	R00 22.07.24
BREAKING LOAD**	100 N***				

^{*} The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.

Subject to change without notice, errors excepted

^{**} According to test specification QM-TP-001

^{***} The static breaking load specification applies in conjunction with the male products 05286 and 05287