

Snap female S inset anchor




patented technology

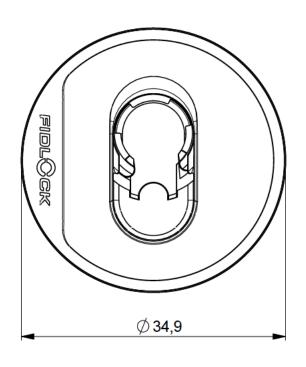

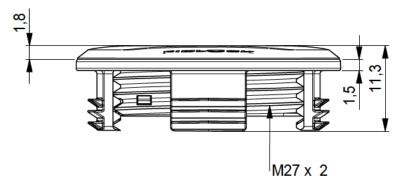

Use T00L34 for assembly and correct logo positioning.

See assembly guide for more information



nominal values in millimeters [mm]

OPENING	Slide (lateral)
MATERIAL	PA66 GF15, NdFeB, Epoxy
COLOUR	Black
WEIGHT	~ 6,2 g (weighed)
BREAKING LOAD**	100 N***

GENERAL NOTES*

Application is designed for various attachment options and compatible with all SNAP female S components ARTICLE NO.

PRODUCT

breaking load direction

SCALE

REVISION / DATE

05517-000001(BLK)

SNAP push female L inset anchor

1:1 DIN A4

R00 22.07.24

1/1

^{*} The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.

^{**} According to test specification QM-TP-001

^{***} The static breaking load specification applies in conjunction with the male products 05286 and 05287