

DATASHEET

HOOK 15 helmet buckle

patented technology

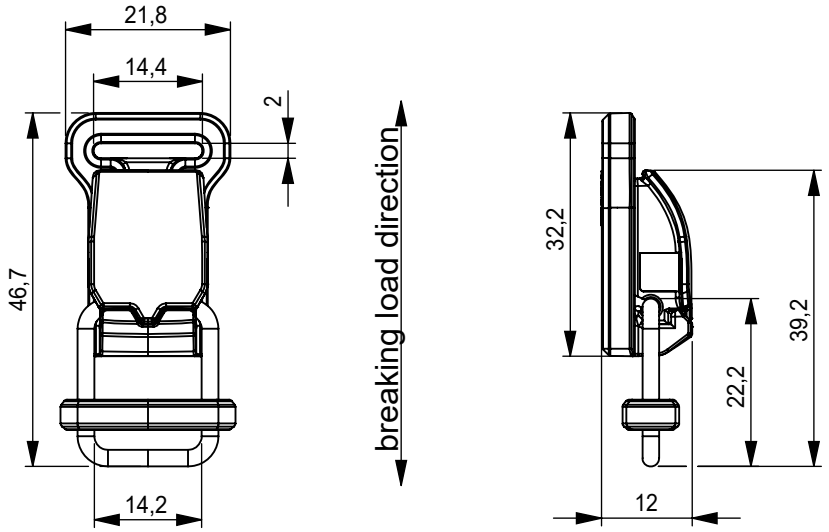

NOTE:
align so that the buckle does not have one direct contact with the jawbone when applied.

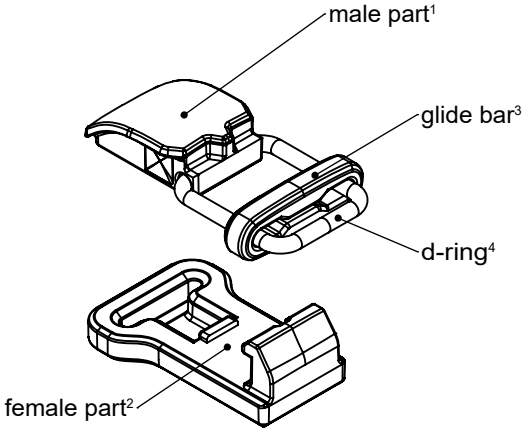

nominal values in millimeters [mm]

OPENING	lift
MATERIAL* **	NdFeB (31%)[1,2], PA66PA6GF (28%), stainless steel (21%), PA6 (18%), Epoxy (1%)
COLOUR	black
WEIGHT	~ 9,4 g (weighed)
BREAKING LOAD**	780 N

GENERAL NOTES*

For an overview of the product standards and the webbing options for which the closure is developed, please refer to document Overview-FIDLOCK-Helmet-Buckles.pdf *

ARTICLE NO.	H-01111-000002(BLK)
PRODUCT	HOOK 15 helmet buckle
SCALE	1:1 DIN A4
REVISION / DATE	R01 14.10.2026

* The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.

** According to test specification QM-TP-001

*** The nominal mass fractions percentage of the materials are given as rounded whole numbers. Fractions below 0.5% are not given.

Subject to change without notice, errors excepted

Fidlock GmbH | Kirchhorster Straße 39 | 30659 Hannover | Germany