


DATASHEET

HOOK 25 rivet single

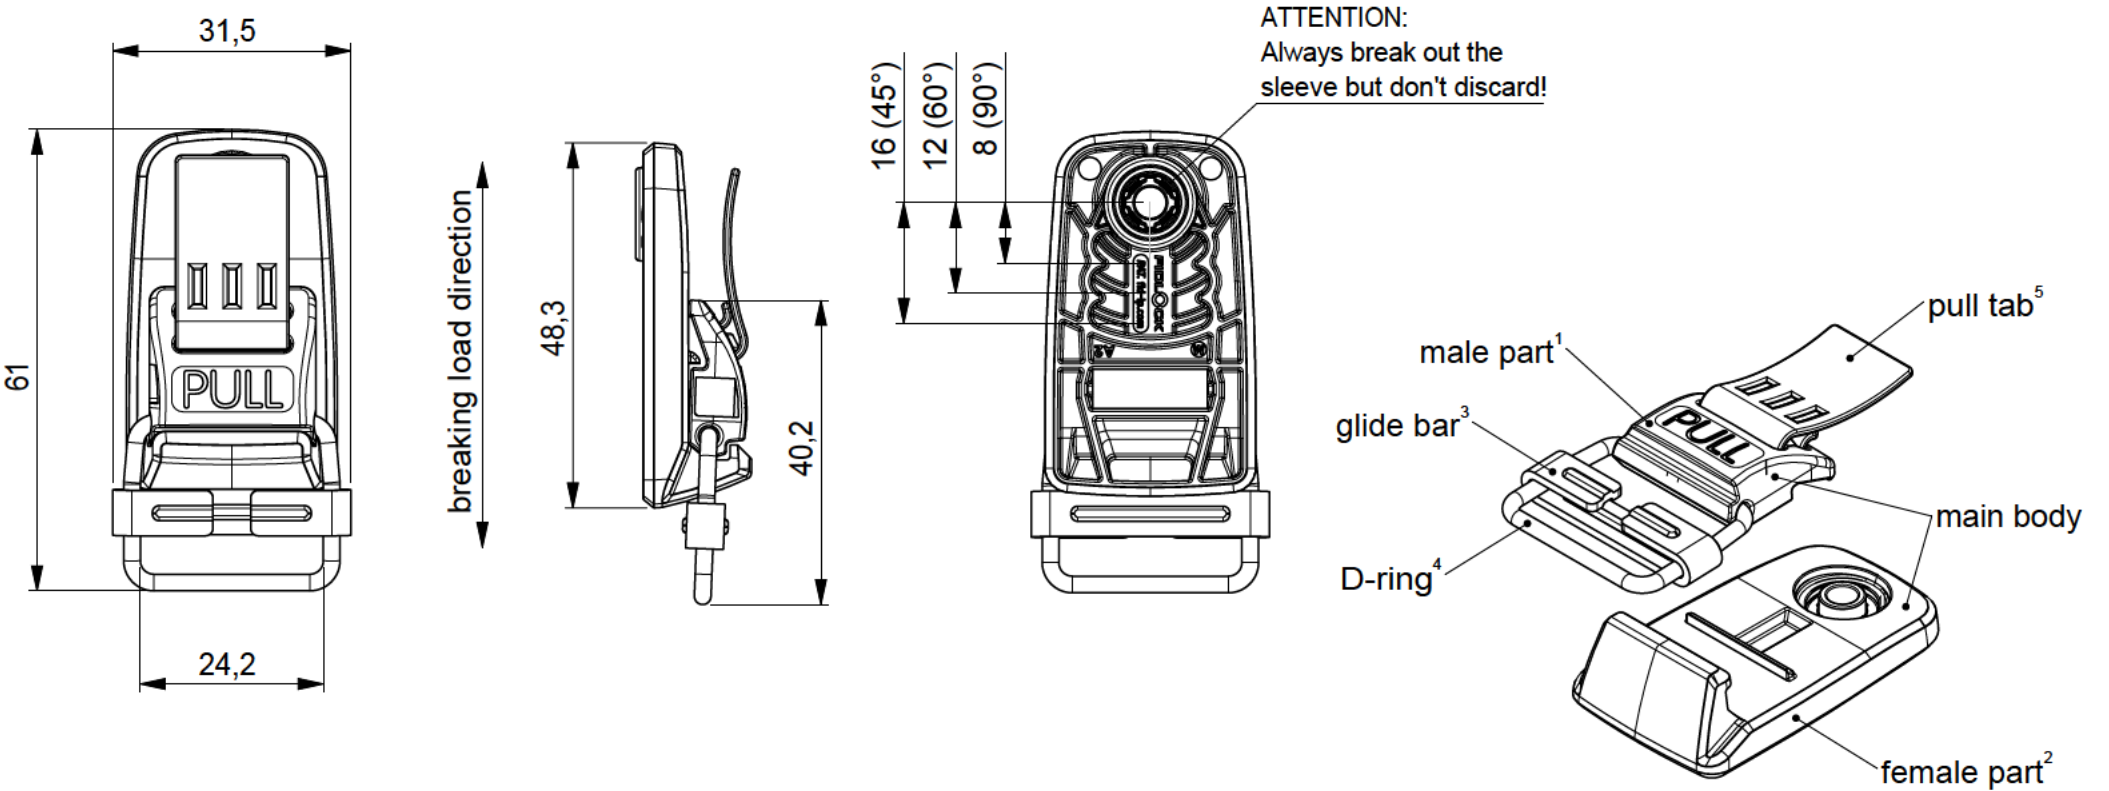

OPENING	lift
MATERIAL	PA6GF ^{1,2} (46%), stainless steel ^{3,4} (28%), NdFeB (24%), nylon fabric ⁵ (2%), epoxy (<1%)
COLOUR	black (main body)
WEIGHT	~ 18 g (weighed)
BREAKING LOAD**	502 N

GENERAL NOTES*

For rotation limitation (45°, 60° or 90°) use a 3mm diameter pin.

For a rotation setup use a M4 screw and washer. Put the washer between the surface and the buckle. Don't discard the sleeve! Use $\leq 0,5\text{Nm}$ to tighten the screw.

For a fixed setup use a M4, M5 or M6 screw. Use $1\text{--}2\text{Nm}$ to tighten the screw.

ARTICLE NO.	H-22437-000002(BLK)R
PRODUCT	HOOK 25 rivet single
SCALE	1:1 DIN A4
REVISION / DATE	R01 09.07.25

* The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.

** According to test specification QM-TP-001

*** The nominal mass fractions percentage of the materials are given as rounded whole numbers. Fractions below 0.5% are not given.