

DATASHEET

HOOK rope sewable RC

patented technology

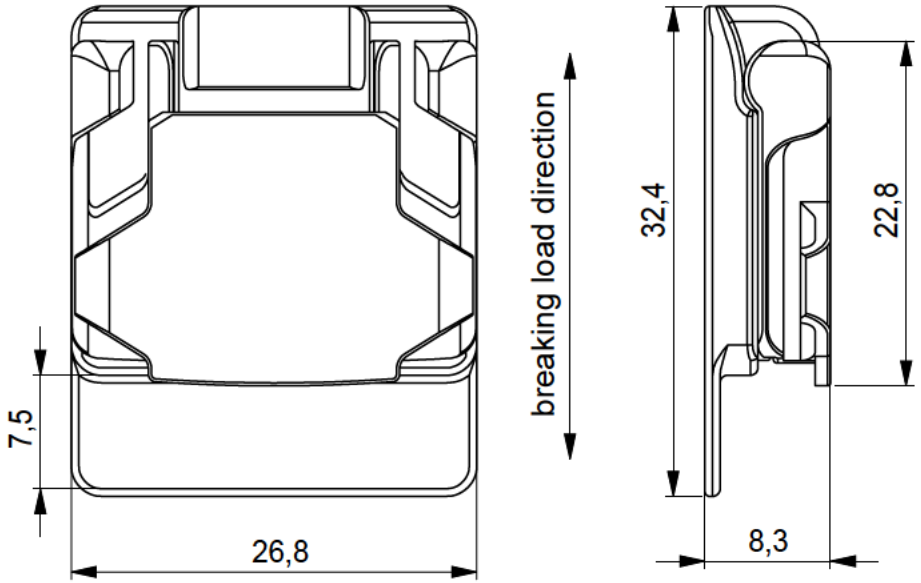

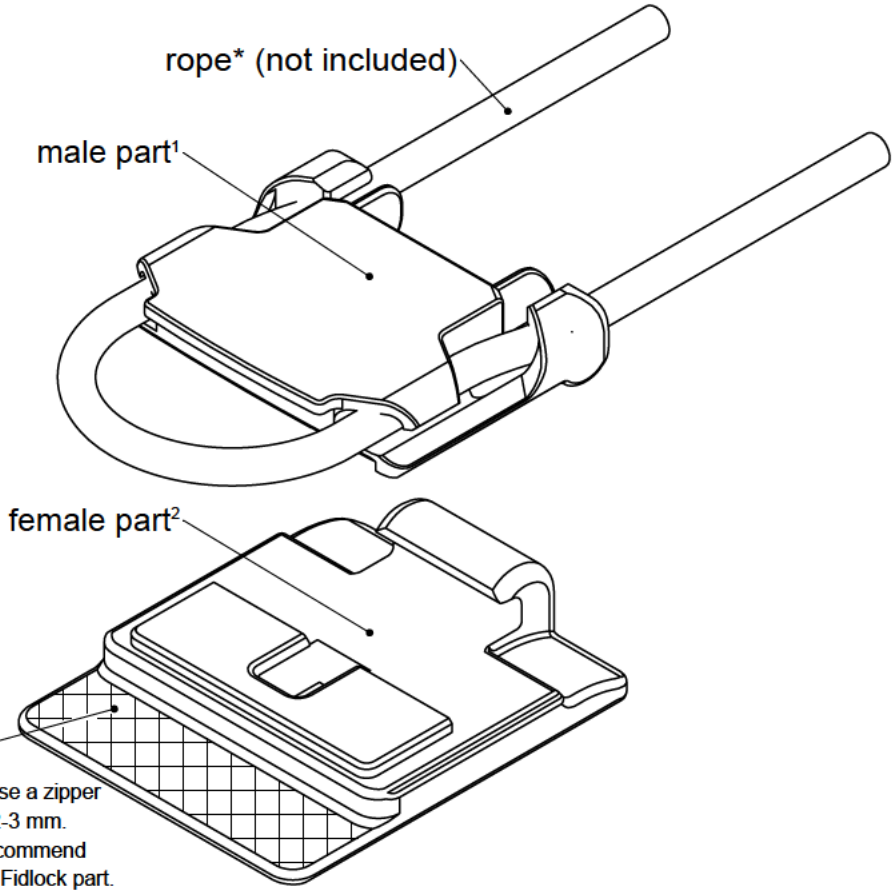

Proceed like stitching zipper. Use a zipper presser foot and stitch length 2-3 mm.
(For securing the thread we recommend choosing a position next to the Fidlock part. Otherwise stability could be reduced.)

nominal values in millimeters [mm]

OPENING	lift
MATERIAL* **	NdFeB (40%), Ocean Material PA66GF¹ (32%), Ocean Material PA6² (24%), epoxy (4%)
COLOUR	black (BLK), blue (5415)
WEIGHT	~ 6,1 g (weighed)
BREAKING LOAD**	20 N

GENERAL NOTES*

Recycled material:
Not suitable for safety-relevant applications

Coloured options:
Colour may vary, due to raw material.
Minor dark particals may appear, due to raw material.

Elastic rope* can have a diameter of 2,5-3 mm.
Rope is not included in order.

ARTICLE NO.	H-32929-000002(BLK)R H-32929-000002(5415)R
PRODUCT	HOOK rope sewable RC
SCALE	2:1 DIN A4
REVISION / DATE	R01 14.10.2026

* The manufacturer of the end products in which FIDLOCK fasteners are used, bears the responsibility for thoroughly testing that the FIDLOCK products are suitable for the intended applications.
** According to test specification QM-TP-001
*** The nominal mass fractions percentage of the materials are given as rounded whole numbers. Fractions below 0.5% are not given.

Subject to change without notice, errors excepted
Fidlock GmbH | Kirchhorster Straße 39 | 30659 Hannover | Germany