


Stitching area

Proceed like stitching zipper  
Use a zipper presser foot and  
stitch length 2-3 mm  
(For securing the thread we  
recommend choosing a position  
next to the Fidlock part.  
Otherwise stability could be  
reduced.)

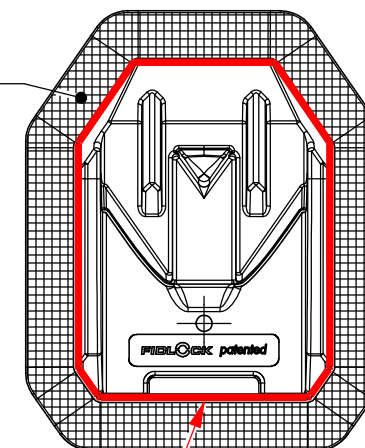

contour for cut out area (underlay)

V-13403: black flap  
V-13203: metal coloured flap

Product	V-Buckle sewable female sewable + male 40 SB
Opening	lifting
Material	PA6, PA66-GF30, stainless steel, NdFeB
Colour	black
Weight	26g
Load capacity	60kg
General notes	also available without pull tabconnection to fabric (strength of yarn, fabric and type of stitching technique) needs to be at least as strong as load capacity, also available without pull tab

Article No	V-13203-000002(BLK) V-13403-000002(BLK)
Scale	1:1
Date	14.04.2021
Author	SO